

08/18/00
JC886 U.S. PTO
09/642532

08-21-00
LAW OFFICES
BARRY R. LIPSITZ
BRADFORD GREEN, BUILDING 8
755 MAIN STREET
MONROE, CONNECTICUT 06468
PATENTS, TRADEMARKS, COPYRIGHTS

TELEPHONE: (203) 459-0200
FAX: (203) 459-0201

A
BARRY R. LIPSITZ
RALPH F. HOPPIN
DOUGLAS M. McALLISTER

jc886 U.S. PTO
09/642532
08/18/00

BOX PATENT APPLICATION
Assistant Commissioner for Patents
Washington, D.C. 20231

UTILITY PATENT APPLICATION TRANSMITTAL
FILED UNDER 37 C.F.R. §1.53(b)

Sir:

Transmitted herewith for filing is the patent application of:

Inventor(s): **C. HEEGARD, et al.**

Title: **RELIABLE DECISION DIRECTED ADAPTATION IN A COMMUNICATION
SYSTEM EMPLOYING FORWARD ERROR CONTROL**

APPLICATION ELEMENTS:

- (1) ☒ Patent Application Specification, including Abstract and claims - 28 pages
(2) ☒ Six (6) sheets of formal drawings, together with transmittal letter
(3) ☐ A check in the amount of \$_____ to cover the ☐ filing fee (\$_____) and/or
☐ Assignment Recordal Fee (\$40) is enclosed.

☐ Before calculating the fee, cancel claim(s)
☐ Before calculating the fee, see copy of Preliminary Amendment filed.

Basic Fee							\$345.00
Multiple Dependent Claims (\$130.)							
Foreign Language Surcharge (\$130.)							
	For	No. Filed	-	No. Extra		Rate	
EXTRA	Total Claims		20		x	\$9.	=
CLAIMS	Independent Claims		3		x	\$39.	=
TOTAL FILING FEE							= \$

- ☐ The Commissioner is hereby authorized to charge any deficiency in the payment of the required fee(s) or credit any overpayment to Deposit Account No. 50-0625.

Box Patent Application
Assistant Commissioner for Patents
Page 2

- (4) ☐ Declaration and Power of Attorney form -- 2 pages
a. ☐ Newly executed
b. ☐ Copy from a prior application
c. ☐ Deletion of inventor(s) -- signed statement attached deleting inventor(s) named in the prior application.
- (5) ☐ Small Entity Declaration
a. ☐ Newly executed
b. ☐ Copy from a prior application. Status still proper and desired.

ACCOMPANYING APPLICATION PARTS:


- (6) ☐ Assignment document
a. ☐ Newly executed (with \$40.00 recordal fee) and separate transmittal Form PTO-1595
b. ☐ Copy from a prior application
- (7) ☐ Preliminary Amendment
- (8) ☐ Certified Copy of Priority Document, together with separate transmittal letter
- (9) ☐ Information Disclosure Statement, together with PTO Form 1449 and copies of cited references
- (10) ☒ Return receipt postage prepaid postcard
- (11) ☒ Express Mail Certificate (Mailing Label No. EL 632 259 861 US)
- (12) ☐ Other:
a. ☐
-
- (13) ☐ If a **CONTINUING APPLICATION**, check appropriate box, and supply the requisite information below:
☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP)
of prior application no.:
Prior application information:
Examiner: Group/Art Unit:
Status:

FOR CONTINUATION or DIVISIONAL APPLICATIONS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under paragraph 4(b) above, is

considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

- (14) ☐ Please amend the specification by inserting before the first line the sentence:
- (15) ☐ This application claims the benefit of _____.
- (16) ☒ Correspondence address:
Barry R. Lipsitz
Law Offices of Barry R. Lipsitz
755 Main Street, Building 8
Monroe, CT 06468
Telephone: (203) 459-0200
- (17) ☒ Pursuant to the provisions of 37 C.F.R. Sections 1.10 and 1.53, Applicants respectfully request that this application be assigned an application number and a filing date of August 18, 2000, the date upon which the application was mailed to the U.S. Patent and Trademark Office by Express Mail No. EL 632 259 861 US.

Respectfully submitted,



Barry R. Lipsitz
Attorney for Applicant(s)
Registration No. 28,637
755 Main Street
Monroe, CT 06468
(203) 459-0200

ATTORNEY DOCKET NO.: ALA-108
Date: August 18, 2000

PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of:

C. HEEGARD, et al.

Application No.:

Filed: Herewith

Title: **RELIABLE DECISION DIRECTED ADAPTATION IN A COMMUNICATION SYSTEM
EMPLOYING FORWARD ERROR CONTROL**

BOX PATENT APPLICATION

Commissioner for Patents
Washington, D.C. 20231

EXPRESS MAIL CERTIFICATE

"Express Mail" Mailing Label No: **EL 632 259 861 US**

Date of Deposit: **August 18, 2000.**

I hereby certify that the attached:

- ☒ Transmittal letter - 3 pages
- ☒ Patent Application Specification including Abstract and claims - 28 pages
- ☒ Six (6) sheets of formal drawings, together with separate transmittal letter

are being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 C.F.R. 1.10 on the date indicated above and is addressed to **BOX PATENT APPLICATION, Commissioner for Patents, Washington, D.C. 20231**

Cathy Dunne

Typed or printed name of person mailing paper or fee

Cathy Dunne

Signature of person mailing paper or fee

Respectfully submitted,

Barry R. Lipsitz

Barry R. Lipsitz
Attorney for Applicant(s)
Registration No. 28,637
Law Offices of Barry R. Lipsitz
755 Main Street, Bldg. No. 8
Monroe, CT 06468
(203) 459-0200

Date: August 18, 2000
Attorney Docket No.: ALA-108

RELIABLE DECISION DIRECTED ADAPTATION IN A COMMUNICATION
SYSTEM EMPLOYING FORWARD ERROR CONTROL

BACKGROUND OF THE INVENTION

The present invention relates to digital
5 communications, and more particularly to a method and
apparatus for providing reliable decision directed
adaptation (such as adaptive equalization) in systems that
employ Forward Error Control (FEC).

In a digital communications system employing forward
10 error control, the receiver is generally set to correct
amplitude, phase and filtering distortions caused by the
transmission channel. Such channel phenomena introduce
intersymbol interference (ISI), carrier offsets and other
effects that must be compensated by the receiver.

15 A well-known means for correcting channel distortions
is to use an equalizer which performs filtering operations
to remove the intersymbol interference resulting from the
channel. The equalizers that are used for these applications
are frequently adaptive in nature, allowing for unknown or
20 time varying changes in the channel characteristics by
adapting the equalization to compensate for the channel
distortions. An equalization technique that is frequently
used in communications systems is the decision-directed
adaptive equalization, in which decision estimates are used
25 by the adaptive equalizer. The decisions used by the

adaptive equalizer are typically from a hard decision quantizer that does not realize the benefit of coding gain that is achieved through error control. When the pre-decoded Signal-to-Noise Ratio (SNR) is relatively low the decision and decision error values are generally unreliable. For this reason, equalization techniques using decision-directed adaptation have previously had limited success. Another approach to equalization is to use the decision and decision error values obtained from the FEC decoder, since these values are in general more accurate than the values from the quantizer. A difficulty with this approach is that the decoding delay of the FEC decoder interferes with an effective and robust method of adaptation. The introduction of any substantial delay in an adaptation loop renders such methods ineffective.

To compensate for other channel effects such as carrier offsets, a method known as a decision directed phase-locked-loop (PLL) is often employed. Again, the relatively low SNR before the FEC decoder and the delay of the decoded data coming from the output of the decoder lead to problems in updating the carrier tracking method.

For the foregoing reasons, there is a need for a method and apparatus for reliable decision-directed adaptation that takes direct advantage of the error detection of the FEC components of a system. In particular, it would be advantageous to provide such a method and apparatus that directs the updating of an adaptive element using a decision-directed adaptation scheme, and that provides for

•

SUMMARY OF THE INVENTION

The present invention is directed to a method for use in a digital communication system employing FEC and having a decision directed adaptive element. The invention provides a method and apparatus for selectively updating the adaptive element. It is an object of the present invention to provide, in a digital communication system employing forward error control and having a decision-directed tracking loop having an adaptive element, a method for selectively updating the adaptive element. The method comprises the steps of generating an estimate of a data symbol from an output of the adaptive element, computing an error signal from the estimate of the data symbol and the output of the adaptive element, passing one or more estimates to a decision quality estimator block (DQEB) which computes one or more decision quality indicators (DQI) of estimates and generates a DQI dependent value, and updating the adaptive element with the error signal based on the DQI dependent value.

It is another object of the present invention to provide, in a digital communication system employing forward error control and having a decision-directed tracking loop having an adaptive element, a method for selectively updating the adaptive element. The method comprises the steps of generating an estimate of a data symbol from an output of the adaptive element, computing an error signal from the estimate of the data symbol and the output of the

adaptive element, determining if the estimate of the data symbol has one or more probable errors, and selectively disabling updates of the adaptive element with the error signal if a determination has been made that the estimate of
5 the data symbol has a probable error.

It is yet another object of the present invention to provide, in a communication system employing a forward error control code and an adaptive processor, a method for selectively updating the adaptive processor. The method
10 comprises the steps of calculating a DQI of an estimate (wherein the estimate is obtained from an output of an adaptive processor), calculating a signal error from the estimate and the output of the adaptive processor, determining if a sequence of DQIs within a window contains
15 at least one transmission error representative value, and disabling an update of the adaptive processor when a transmission error representative value is present within the window.

It is a further object of the invention to provide an
20 apparatus for selectively updating an adaptive element of a communication system. The apparatus comprises an adaptive element, an estimation circuit for generating an estimate of a symbol from an output of the adaptive element, an error calculating circuit for computing a difference between the
25 output of the adaptive element and the estimate, a transmission error estimation circuit for identifying probable errors in a symbol, and an adaptation controller

for controlling the updating of the adaptive element based on the identification of the probable errors in the symbol.

The present invention can be applied to any decision-directed tracking loop having an adaptive element. Such
5 elements can include, for example, adaptive equalizers, timing recovery systems, carrier recovery systems, automatic gain controls and others. The invention allows for data that has a high probability of being erroneous to be excluded from the adaptation process of an adaptive element,
10 thus increasing the ability of the adaptive element to converge on reliable parameters. This allows for more rapid convergence and better system performance, particularly in high noise environments, such as wireless communications and wired communications.

15 These and other features and objects of the invention will be more fully understood from the following detailed description of the preferred embodiments that should be read in light of the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

The accompanying drawings, which are incorporated in and form a part of the specification, illustrate the embodiments of the present invention and, together with the description serve to explain the principles of the invention.

In the drawings:

Figure 1 shows a block diagram of an adaptive processing in the prior art;

10 Figure 2 shows a block diagram of an adaptive processing according to the invention;

Figure 3 shows a block diagram of an adaptive decision-feedback equalizer using the invention;

15 Figure 4 shows a block diagram of a decision-directed digital phase-locked loop using the invention;

Figure 5 shows a block diagram of a BCC encoder; and

Figure 6 shows a block diagram of a BCC syndrome calculator and window device.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

In describing a preferred embodiment of the invention illustrated in the drawings, specific terminology will be used for the sake of clarity. However, the invention is not
5 intended to be limited to the specific terms so selected, and it is to be understood that each specific term includes all technical equivalents which operate in a similar manner to accomplish a similar purpose.

With reference to the drawings, in general, and Figures
10 1 through 6 in particular, the method and apparatus of the present invention is disclosed.

Figure 1 is a block diagram of a prior art adaptive processor for use in channels with time-varying or unknown characteristics. The adaptive processor 100 shown in Figure
15 1 is based on a baseband model, that assumes that the demodulation is performed prior to the processing. As should be appreciated from the discussion below, the method of the present invention can be applied to either a baseband or passband processing model.

As illustrated in Figure 1, a received signal 115 is
20 presented to an adaptive processor 100 which can be a linear or a non-linear filter with a transversal or recursive structure, or a phase-locked loop or other adaptive signal processing element. Filter structures and phase-locked loops
25 are well known to those skilled in the art.

The parameters of the adaptive processor 100 are updated to minimize the noise, the intersymbol interference

(ISI), the phase noise, or other sources of error at the output. The adaptive processor 100 works in conjunction with an update algorithm 140 to update its parameters.

The update algorithm 140 is driven by an error signal
 5 error 105, that indicates to the update algorithm 140 how to update the adaptive parameters to more accurately represent the transmitted data symbol at the output of the adaptive processor 100. The update algorithm 140 can be based on the Zero Forcing (ZF) algorithm, the Least-Mean Squares (LMS)
 10 algorithm, the Recursive Least-Squares (RLS) algorithm, or other adaptation algorithms that are well known to those skilled in the art.

As illustrated in Figure 1, the error signal, error 105, is the output of an Error Calculation 160, that is a
 15 function of the quantizer 120 input, represented by d_{est} 107, and the quantizer 120 output, represented by $d_{decision}$ 125. A switch and a reference signal generator can be added to the system shown in Figure 1 to allow for a training sequence to be utilized to train the adaptive processor 100.

20 The adaptation of the parameters in the steady-state mode, as illustrated in Figure 1, is decision directed. The quantizer 120 makes a hard decision from the output of the adaptive processor 100 and generates an estimate of the data symbol, $d_{decision}$ 125, that is equal, in absence of noise
 25 and ISI, to the output of the adaptive processor 100, represented here as signal d_{est} 107. This signal is given to the FEC decoder 170, for error correction processing and final detection of the data.

Figure 2 is a block diagram of a representative adaptive processor that can be used as part of the present invention. In this diagram, the received signal 115 is applied to the adaptive processor 100 as also illustrated in Figure 1

The adaptive processor 100 attempts to mitigate the distortions present in the signal 115, thus permitting accurate detection of the data symbols. In one embodiment of the invention, the detected data symbol, d_{est} 107, generated by the adaptive processor 100, is applied to the quantizer 120 and to FEC decoder 170.

The estimated decision error signal error 105 is computed, as described in Figure 1, from d_{est} 107 and from the estimated data symbol, $d_{decision}$ 125. The estimated data symbol is also called the decision. The quantizer 120 produces an estimate of the transmitted data symbol, $d_{decision}$ 125. For low SNRs, $d_{decision}$ 125 may be frequently in error compared to the transmitted data. In the case of a transmission error both $d_{decision}$ 125 and error 105 will provide false information to the adaptation algorithm controlling the processor.

In one embodiment of the present invention, the error pattern present within a sequence of decisions is detected by a decision quality estimator block (DQEB) 200 which may be implemented as a syndrome calculator. An enable generator within the DQEB 200 determines if a transmission error representative value is present within a sequence of symbols and also determines how long to disable the

adaptation. An implementation of the DQEB 200 as a syndrome calculator will be described with respect to Figure 6.

As illustrated in Figure 2, the output of the DQEB 200, represented as enable 205, is used by the update algorithm

5 140 to determine whether to update the parameters of the adaptive processor 100 or not. This determination may be made by an adaptation controller which may be part of the update algorithm 140 or implemented separately. In

accordance with one embodiment of the present invention, the error signal, error 105, is multiplexed with an error value of zero (0). The update of the adaptive processor 100 is enabled when enable 205 is equal to one (1). In this case, the output of the multiplexer (not shown here) is equal to error 105. When the DQEB 200 detects a transmission error

15 within its window, enable 205 disables the adaptation of the adaptive processor 100 by multiplexing an error value of 0 instead of the usual error signal error 105. Alternatively, the error value can be any value that can disable the updating of the adaptive parameters.

20 In another embodiment of the invention, the error signal, error 105, is used to make tentative updates of the adaptive parameters in the update algorithm 140. The tentative updates are accepted or rejected once the enable signal 205 is provided by the DQEB 200. The update of the
25 adaptive processor 100 is accepted when enable 205 is equal to one. In this case, the adaptive parameters calculated by the update algorithm 140 are supplied to the adaptive processor 100 based on the error 105 samples that are deemed

reliable by the DQEB 200. When the DQEB 200 detects a transmission error within its window, enable 205 directs the update algorithm 140 to reject the tentative updates based on the suspect error 105 samples that are deemed unreliable
 5 by the DQEB 200.

The system illustrated in Figure 2 thus allows for discrimination between error signals that are believed to be inaccurate due to reception errors, and error signals that are believed to be an accurate measurement of the received
 10 signal. In this embodiment, the FEC decoder 170 decodes the detected data symbols, d_{est} 107 to recover the transmitted information data. This decision quality-controlled adaptation, although described with respect to an adaptive processor, can be applied to any tracking loop system using
 15 decision-directed adaptation and FEC. Some of the tracking loop systems to which the invention can be applied include adaptive equalizers, timing and carrier recovery loops, and automatic gain control systems. Other loops that are adaptive and support the detection and symbol determination
 20 process can also benefit from the present invention.

Figure 3 is a block diagram of a reliable adaptive decision-feedback adaptive equalizer. In this embodiment the received signal 115 is filtered by a feed-forward equalizer 300 (FFE). The output of the FFE 300 produces d_{est} 107 once
 25 the output of the decision-feedback filter 310 (DFF) is subtracted. The DFF 310 is a filter which draws its input from the $d_{decision}$ 125 signal produced by the quantizer 120. The error 105 is obtained from the difference of d_{est}

107 and d_decision 125. The error 105 is used to estimate updates for the parameters of the FFE and DFF when the DQEB 200 indicates, via enable 205, that the data is reliable.

Decision directed adaptive decision-feedback equalizer

5 methods are well known to those skilled in the art.

The quantizer 120 output is applied to the DQEB 200 in order to detect the presence of error in the d_decision 125. Since the update algorithm uses the error signal between the detected data symbol at the input of the quantizer 120 and
10 the decision at the output of the quantizer 120, the multiplexing method of the present invention described in accordance with Figure 2 can be applied. The error signal can be multiplexed with a disabling error value that, when passed to the update algorithm, disables the update.

15 Similarly, the tentative update with acceptance or rejection of the result based upon the enable 205 from the DQEB 200 can be applied to the DFE adaptive equalizer illustrated in Figure 3.

Figure 4 is a block diagram of a reliable carrier-
20 recovery phase-locked loop. In this embodiment, the received signal 115 is mixed by a carrier signal 409. The output of the mixer produces a data_estimate (d_est) 410 that is quantized to d_decision 125. The error signal 105 is obtained from the data_estimate 410, d_decision 125 and
25 knowledge of the signal constellation. For example, for a QAM constellation, a typical error signal can be

$$\text{Error} = \text{real}(z) * (\text{imag}(z) - \text{real}(x)) - \text{imag}(z) * (\text{real}(z) - \text{real}(x))$$

where $x = d_decision$, $z = Data_Estimate$, $real(x)$ = the real part of x , and $imag(x)$ = the imaginary part of x . The error 105 is used to estimate updates for the parameters of the loop filter 430 when the DQEB 200 indicates, via enable 205, that the data is reliable. Typical parameters for the loop filter might include the estimated phase offset and frequency offset of the carrier on the received signal 115. The loop filter 430 produces a phase estimate, P_est 407, that is an estimate of the current phase of the carrier.

10 This phase estimate is translated, via trigonometric function 440, into the carrier signal 409 that is mixed with the received signal 115. Such decision directed phase-locked loop methods are well known to those skilled in the art.

The quantizer 120 output is applied to the DQEB 200 in 15 order to detect the presence of error in estimated data symbols $d_decision$ 125. The multiplexing method of the present invention described in accordance with Figure 2 can be applied. The error signal can be multiplexed with a disabling error value of zero that, when passed to the loop 20 filter 430, disables the update. Similarly, the tentative update with acceptance or rejection of the result based upon the enable 205 from the DQEB 200 can also be applied.

Figure 5 illustrates an encoder for a 64 state, rate $1/2$ BCC. In this case, the generator matrix $G = [133, 175]$ 25 (given in octal notation) = $[1+D+D^3+D^4+D^6, 1+D^2+D^3+D^4+D^5+D^6]$ results in an encoder with a single binary input 500 and two binary outputs 510, 520. The input 500 is passed through a binary shift register of length 6.

The outputs are computed as linear combinations, modulo 2, of the input and the contents of the shift register. The specific linear combination depends on the generator matrix G . (Note: addition modulo 2 is equivalent to the binary XOR operation.) As can be seen in Figure 5, working from the input at the left to the output at the right, the output of the first, third, fourth and sixth stages ("D") are XOR'd with the input in the upper path, resulting in the term $1+D+D^3+D^4+D^6$. Similarly, the output of the second, third, fourth, fifth and sixth stages are XOR'd with the input in the lower path, resulting in the term $1+D^2+D^3+D^4+D^5+D^6$.

Figure 6 illustrates a syndrome calculator for the convolutional code with encoder given in Figure 5. The parity check matrix for the convolutional code is $H = [175, 133] = [1+D^2+D^3+D^4+D^5+D^6, 1+D+D^3+D^4+D^6]$ as illustrated in Figure 6. The syndrome calculator consists of two components, a parity check calculator and an enable generator. The parity check calculator has two binary inputs 610, 620 and a binary output syndrome 600. The syndrome 600 is calculated as a linear combination, modulo 2, of the input and the contents of a shift register. The specific linear combination depends on the parity check matrix H . The value of a sequence of syndromes 600 indicates the validity of the input with respect to the BCC. For example, without the presence of errors, if the outputs of the encoder in Figure 5 are input to the parity check calculator, then the syndrome 600 will be zero. Use of a syndrome calculator to

determine the error pattern of a transmission is well known to those skilled in the art.

The results of the parity check calculation are passed through a shift register of length n . In one embodiment, the length of the shift registers can be set as a design parameter that need not be tied to parameters of the forward error control code such as the length of the encoder or parity-check registers. Alternatively, the length of the shift-register can be a function of the parameters of the FEC code. Changing the length of the register trades off the two types of error in binary hypothesis testing problems. A long register will reduce the chance of declaring the data error free when errors do in fact exist in the data. On the other hand, a long register will often reject error free data and limit the frequency of parameter update.

The output of the syndrome calculator, enable 205, is computed by performing a transmission error detection operation that can be an inclusive 'nor' (NOR) logic operation over the content of the window of shift register 640. In this embodiment, when a syndrome value of one is present within the window, the output of the decision device is equal to zero, disabling the adaptation of the update calculator.

Although the syndrome calculator is illustrated for a convolutional code, the present invention can also be applied to systems using block codes or other types of codes such as linear codes and cosets (affine translations) of

linear codes. For example, a simple ($n = 7$, $k = 4$) binary Hamming code is described by the generator matrix

$$G = \begin{bmatrix} 1 & 0 & 0 & 0 & 1 & 1 & 1 \\ 0 & 1 & 0 & 0 & 0 & 1 & 1 \\ 0 & 0 & 1 & 0 & 1 & 0 & 1 \\ 0 & 0 & 0 & 1 & 1 & 1 & 0 \end{bmatrix}$$

and parity check matrix

$$H = \begin{bmatrix} 1 & 0 & 1 & 1 & 1 & 0 & 0 \\ 1 & 1 & 0 & 1 & 0 & 1 & 0 \\ 1 & 1 & 1 & 0 & 0 & 0 & 1 \end{bmatrix}.$$

The codewords are the sixteen length 7 binary vectors that lie in the row space of the generator matrix, $c = m \cdot G$. A binary vector of length 7 is a codeword of the code if and only if it lies in the null space of the parity check matrix $c \cdot H = 0$. For a given vector x of length 7, the syndrome $S =$

$x \cdot H$ or, in this case

$$S = [S_1 \ S_2 \ S_3]$$

$$S_1 = x_1 + x_3 + x_4 + x_5$$

$$S_2 = x_1 + x_2 + x_4 + x_6$$

$$S_3 = x_1 + x_2 + x_3 + x_7$$

indicates a codeword if and only if $S_1 = S_2 = S_3 = 0$. In one embodiment, the syndrome calculator issues an enable when the syndromes are calculated over the block of seven symbols.

In one embodiment of the present invention, the decision quality indicator-controlled adaptation is applied to adaptive systems using block update with rate r . In systems using rate r block update, the parameters are
5 updated once every r symbols. For example, a system using a QPSK modulation can update the parameters of the processor once every 4 QPSK symbols. In this embodiment, the window length can be set accordingly. For example if the QPSK modulation is preceded by a rate 1/2 binary convolutional
10 code, a window length of four can be used in the syndrome calculator.

It should now be appreciated that the present invention provides techniques for selectively updating an adaptive element in a communications receiver based on a
15 determination that the received data is accurate. When inaccurate data is received, the system determines that using that data to update the adaptive element will not be beneficial and excludes the data from being sent to the adaptive element. One mechanism for determining that data
20 has been incorrectly received is the calculation of syndromes as part of a forward error correction system. Detection of errors through use of the syndrome calculation can be supplemented through windowing to make a determination as to whether a number of received bits should
25 be used or disregarded by the adaptive element. The adaptive element can comprise any number of decision-directed loops, such as adaptive processors and carrier and timing recovery loops.

Although the invention has been illustrated by reference to specific embodiments, it will be apparent to those skilled in the art that various changes and modifications may be made which clearly fall within the scope of the invention. The invention is intended to be protected broadly within the spirit and scope of the appended claims.

What is claimed is:

1. In a digital communication system employing forward error control and having a decision-directed tracking loop with an adaptive element, a method for selectively updating the adaptive element, said method comprising the steps of:
 - (a) generating an estimate of a data symbol from an output of the adaptive element;
 - (b) computing an error signal from the estimate of the data symbol and the output of the adaptive element;
 - (c) passing one or more estimates to a decision quality estimator which computes one or more decision quality indicators of estimates and generates a decision quality indicator dependent value; and
 - (d) updating the adaptive element with the error signal based on the decision quality indicator dependent value.
2. The method of claim 1 wherein:
said decision quality estimator comprises a syndrome calculator; and
the decision quality indicator is a syndrome.
3. The method of claim 2 wherein the syndrome calculator performs the following steps:

- (i) a parity-check operation to compute one or more syndromes of estimates; and
- (ii) a transmission error detection operation over the syndromes contained in a window of shift registers;

said transmission error detection operation generating a syndrome dependent value.

4. The method of claim 3 wherein the transmission error detection operation is an inclusive 'NOR' operation.
5. The method of claim 3 wherein the window has a length equal to one.
6. The method of claim 3 wherein the window has a length that is a function of a forward error control code.
7. The method described in claim 1 wherein step (d) comprises the further steps of:
 - (i) multiplexing the error signal with an adaptation-disabling value; and
 - (ii) disabling the update when a transmission error is detected.
8. The method of claim 7 wherein the adaptation-disabling value is a zero value.
9. The method described in claim 1 wherein step (d) comprises the further steps of:

- (i) analyzing the decision quality indicator dependent value to determine if a transmission error has occurred; and
 - (ii) rejecting a tentative update if it is determined that a transmission error has occurred.
10. In a digital communication system employing forward error control and having a decision-directed tracking loop with an adaptive element, a method for selectively updating the adaptive element, said method comprising the steps of:
- (a) generating an estimate of a data symbol from an output of the adaptive element;
 - (b) computing an error signal from the estimate of the data symbol and the output of the adaptive element;
 - (c) determining if the estimate of the data symbol has one or more probable errors; and
 - (d) selectively disabling updates of the adaptive element with the error signal if a determination has been made that the estimate of the data symbol has a probable error.
11. The method of claim 10 wherein the adaptive element performs an equalization function.
12. The method of claim 10 wherein the adaptive element performs a timing recovery function.

13. The method of claim 10 wherein the adaptive element performs a carrier recovery function.
14. The method of claim 10 wherein the adaptive element performs an automatic gain control function.
15. In a communication system employing a forward error control code and an adaptive processor, a method for selectively updating the adaptive processor, the method comprising the steps of:
 - (a) calculating a decision quality indicator of an estimate wherein the estimate is obtained from an output of an adaptive processor;
 - (b) calculating a signal error from the estimate and the output of the adaptive processor;
 - (c) determining if a sequence of decision quality indicators within a window contains at least one transmission error representative value; and
 - (d) disabling an update of the adaptive processor when a transmission error representative value is present within the window.
16. The method of claim 15 further comprising the step of:
 - (e) enabling the update of the adaptive processor when the sequence of decision quality indicators within the window contains no transmission error representative value.

17. The method of claim 15 wherein the size of the window of step (c) is dependent on a forward error control code.
18. The method of claim 17 wherein the forward error control code is a block code and the size of the window of step (c) is set equal to the size of a block of information.
19. The method of claim 17 wherein the forward error control code is a convolutional code and the size of the window of step (c) is set equal to the constraint length of the convolutional code.
20. The method of claim 17 wherein the adaptive processor is based on a block update with a certain rate and wherein the size of the window is set proportional to the block update rate.
21. An apparatus for selectively updating an adaptive element of a communication system, the apparatus comprising:
 - (a) a quantizer for generating an estimate of a symbol from an output of the adaptive element;
 - (b) an error calculator for computing a difference between the output of the adaptive element and the estimate;
 - (c) a decision quality estimator for computing one or more decision quality indicators of estimates and

generating a decision quality indicator dependent value; and

- (d) an adaptation controller for controlling the updating of the adaptive element based on the decision quality indicator dependent value.

22. The apparatus of claim 21 wherein the adaptive element is an adaptive equalizer.

23. The apparatus of claim 21 wherein the adaptive element is a carrier recovery circuit.

24. The apparatus of claim 21 wherein the adaptive element is a timing recovery circuit.

25. The apparatus of claim 21 wherein the adaptive element is an automatic gain control circuit.

26. The apparatus of claim 21 wherein the decision quality estimator is a syndrome calculator.

27. The apparatus of claim 26 wherein the syndrome calculator comprises:

- (i) a parity check calculator; and
- (ii) an enable generator containing a window of shift-registers, the enable generator having an output based on a NOR operation performed over the contents of the window of shift-registers.

28. The apparatus of claim 21 wherein the adaptation controller comprises a multiplexer for multiplexing an error signal with an adaptation-disabling value, the adaptation controller having an output based on an output of the decision quality estimator.
29. An apparatus for selectively updating an adaptive element of a communication system, the apparatus comprising:
- (a) an estimation circuit for generating an estimate of a symbol from an output of the adaptive element;
 - (b) an error calculating circuit for computing a difference between the output of the adaptive element and the estimate;
 - (c) a transmission error estimation circuit for identifying probable errors in a symbol; and
 - (d) an adaptation controller for controlling the updating of the adaptive element based on the identification of the probable errors in the symbol.
30. The apparatus of claim 29 wherein the adaptive element is an adaptive equalizer.
31. The apparatus of claim 29 wherein the adaptive element is a carrier recovery circuit.

32. The apparatus of claim 29 wherein the adaptive element is an automatic gain control circuit.

ABSTRACT OF THE DISCLOSURE

The present invention provides a method and apparatus for selectively updating an adaptive element in a communications receiver based on a determination that the received data is accurate. When inaccurate data is received, the system determines that using that data to update the adaptive element will not be beneficial and excludes the data from being sent to the adaptive element. One mechanism for determining that data has been incorrectly received is the calculation of syndromes as part of a Forward Error Control (FEC) system. Detection of errors through use of the syndrome calculation can be supplemented through windowing to make a determination as to whether a number of received bits should be used or disregarded by the adaptive element. The adaptive element can comprise any number of decision-directed loops including adaptive processors and carrier and timing recovery loops.

P A T E N T

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of:

C. HEEGARD, et al.

Application No.:

Filed: Herewith

For: RELIABLE DECISION DIRECTED ADAPTATION IN A
COMMUNICATION SYSTEM EMPLOYING FORWARD ERROR
CONTROL

DRAWING REVIEW BRANCH
Commissioner for Patents
Washington, D.C. 20231

CERTIFICATE OF MAILING

I hereby certify that this correspondence is being deposited with the United States Postal Service with sufficient postage as Express Mail (No. EL 632 259 861 US) in an envelope addressed to: BOX PATENT APPLICATION, Commissioner for Patents, Washington, D.C. 20231 on:

August 18, 2000

By:

Cathy Dunne
Cathy Dunne

TRANSMITTAL OF FORMAL DRAWING(S)

Dear Sir:

Enclosed are six (6) sheets of formal drawings for filing in the above-referenced patent application.

Please advise the undersigned attorney if correction is necessary.

Respectfully submitted,

Barry R. Lipsitz

Barry R. Lipsitz
Attorney for Applicant(s)
Registration No. 28,637
755 Main Street, Bldg. No. 8
Monroe, CT 06468
(203) 459-0200

Date: August 18, 2000
ATTORNEY DOCKET NO.: ALA-108

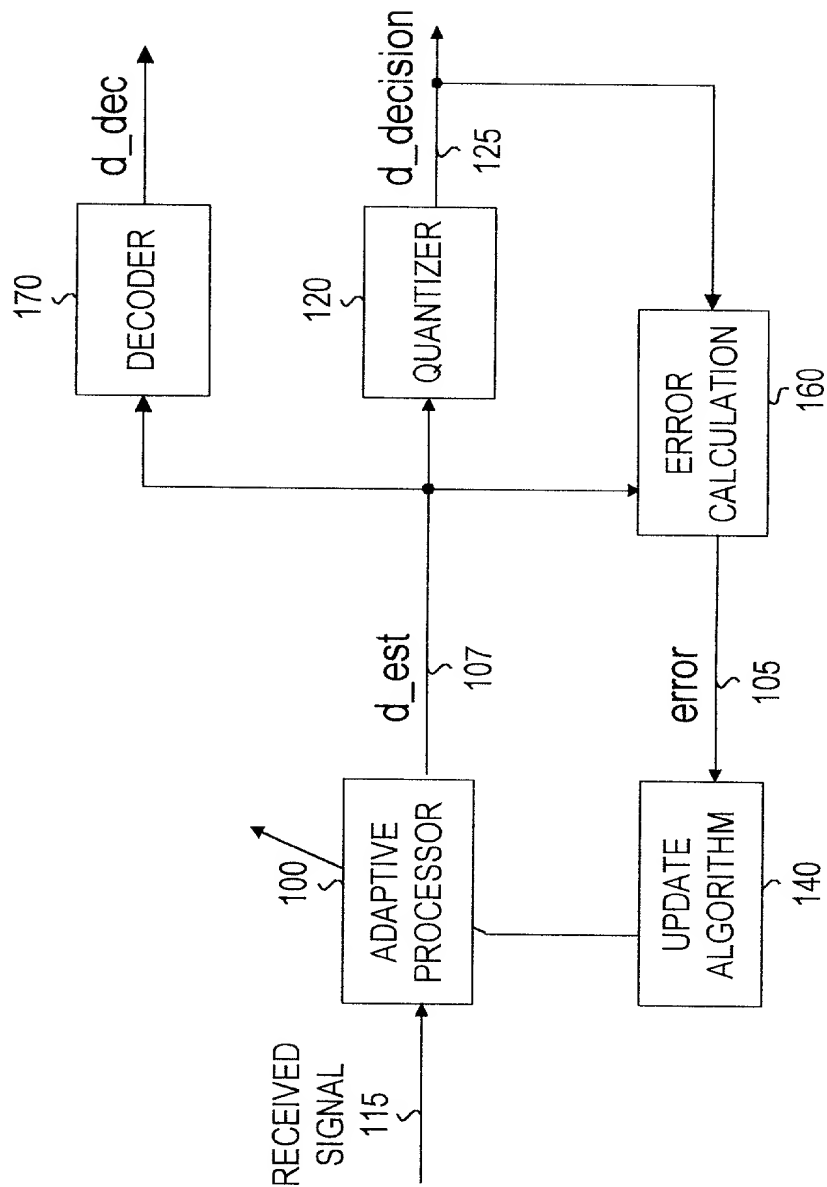


FIG. 1 (PRIOR ART)

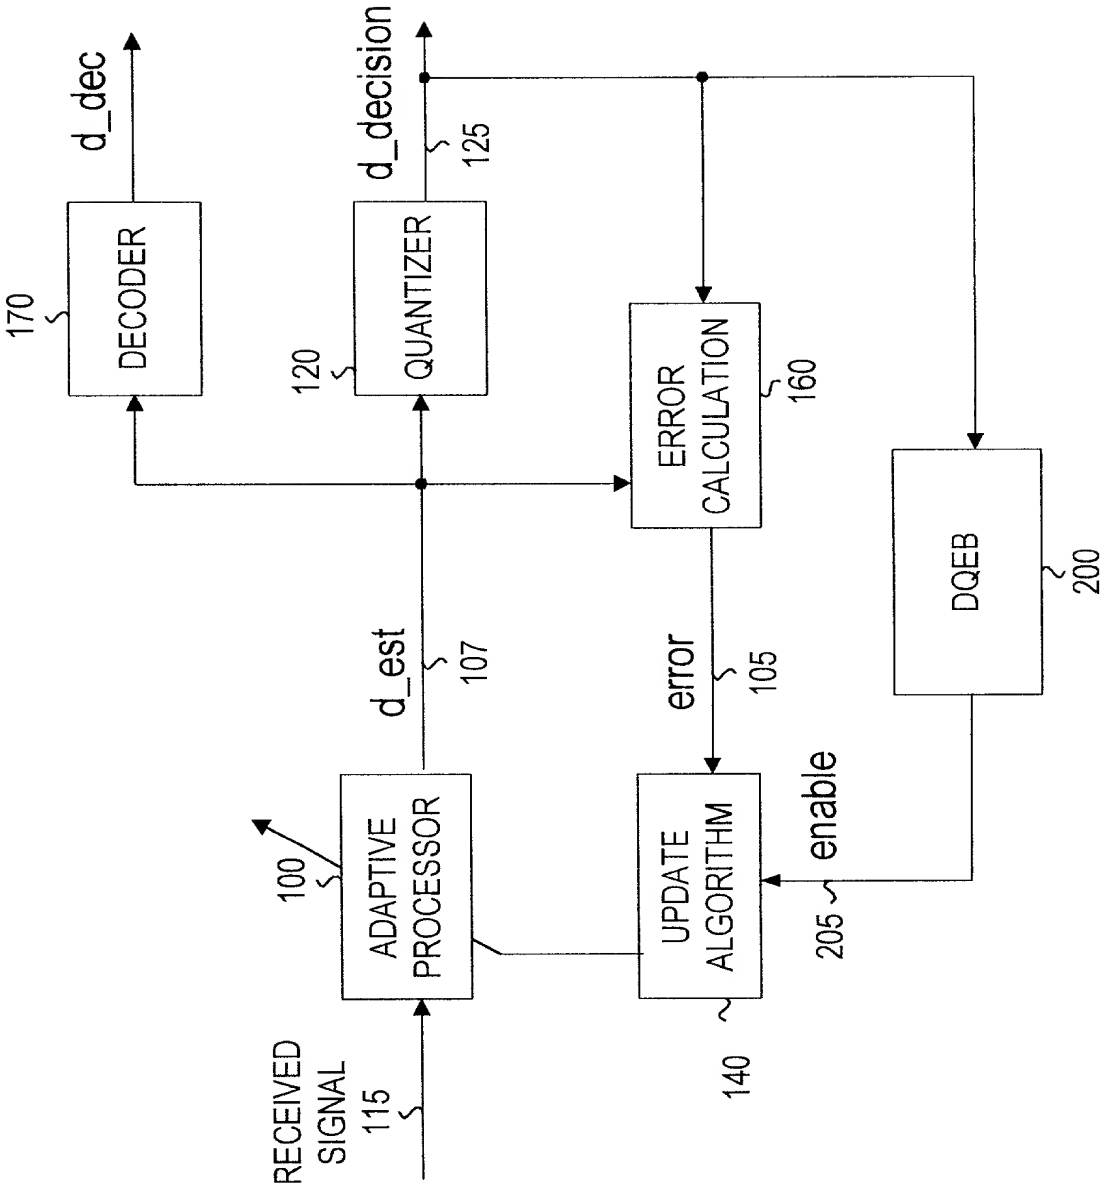
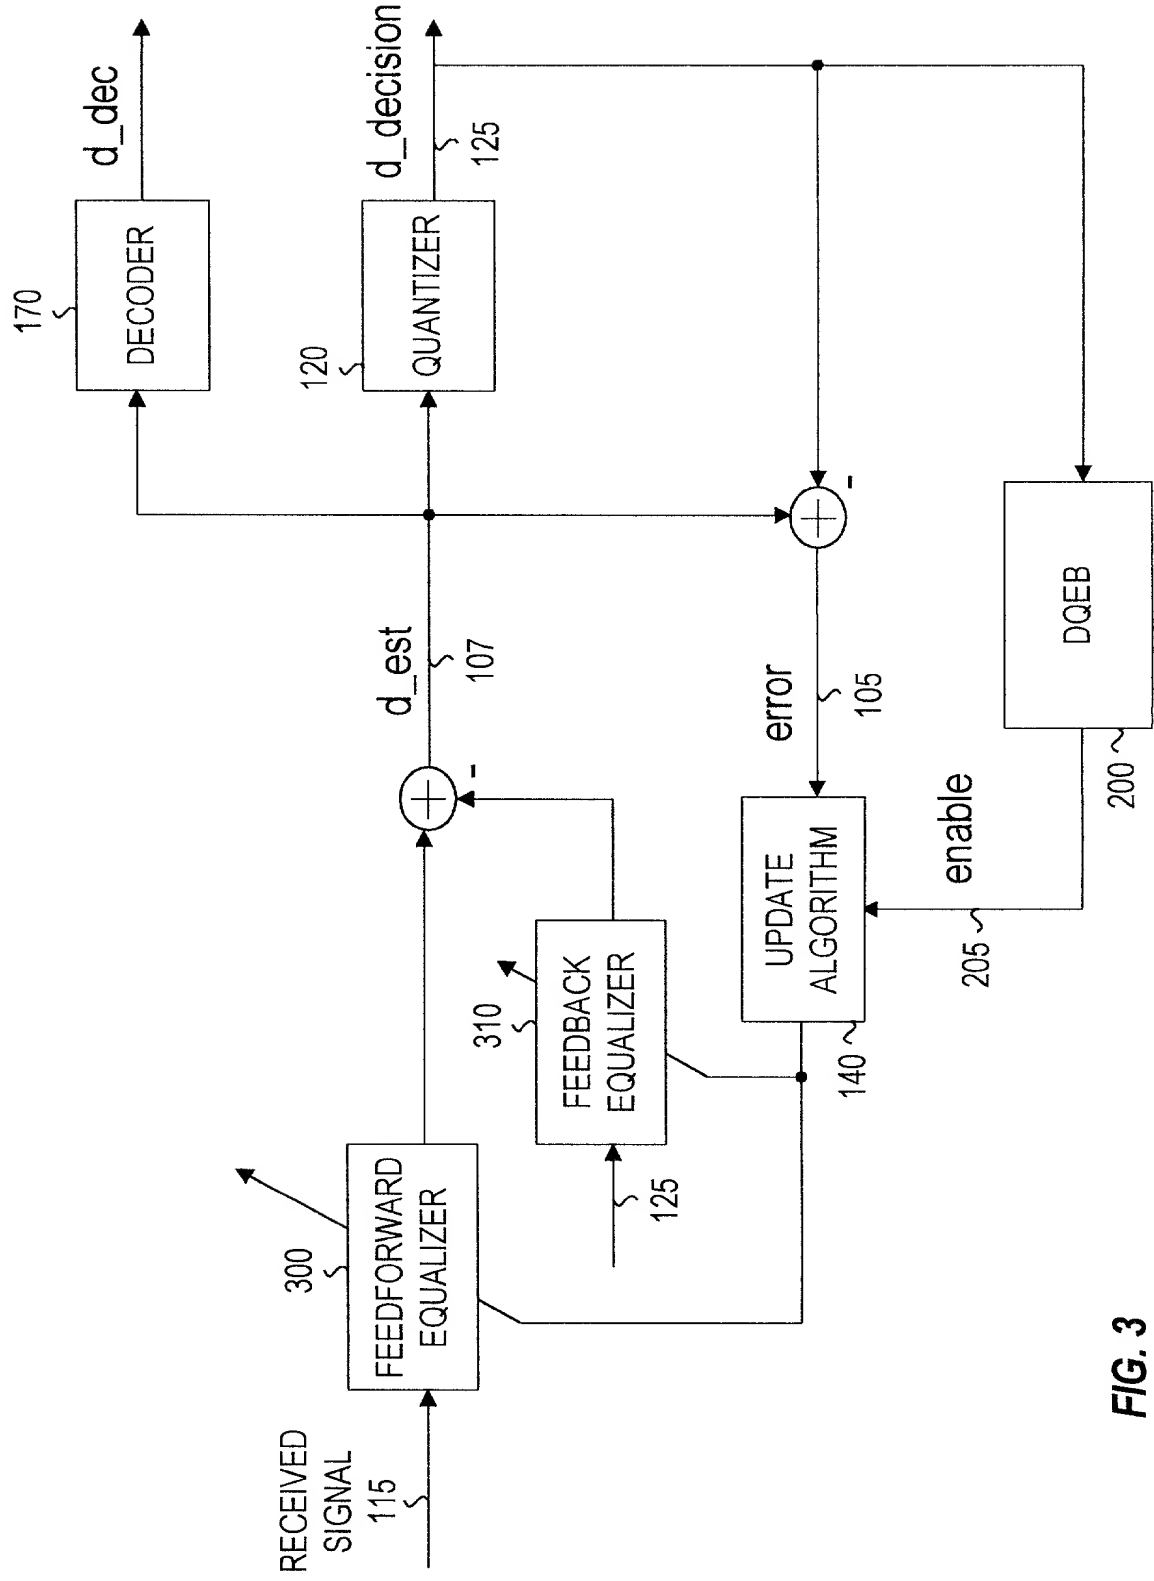


FIG. 2



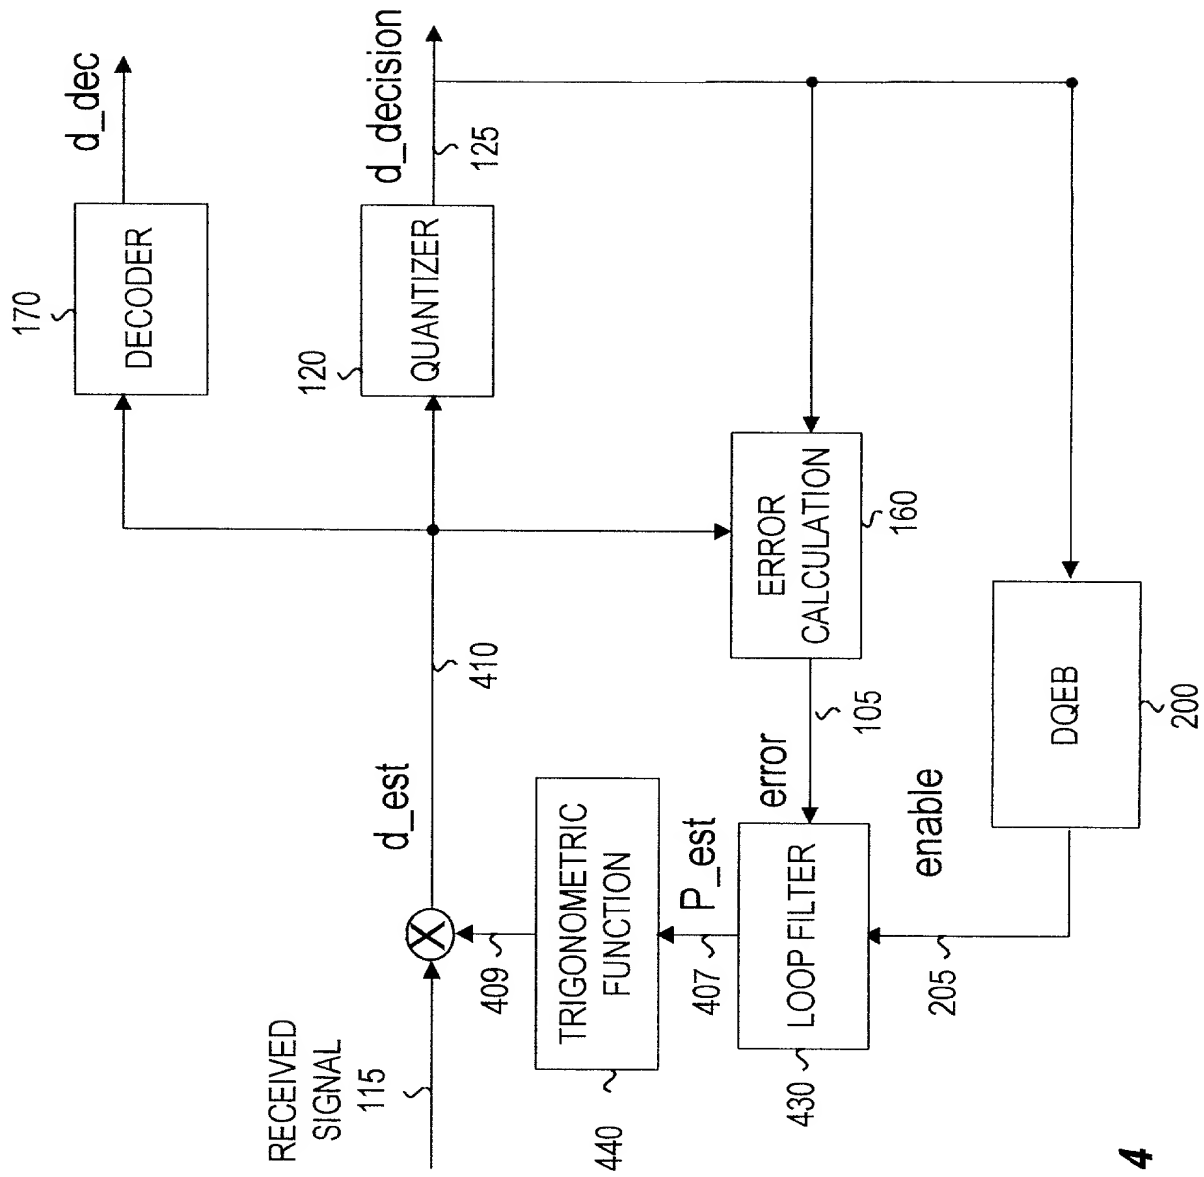


FIG. 4

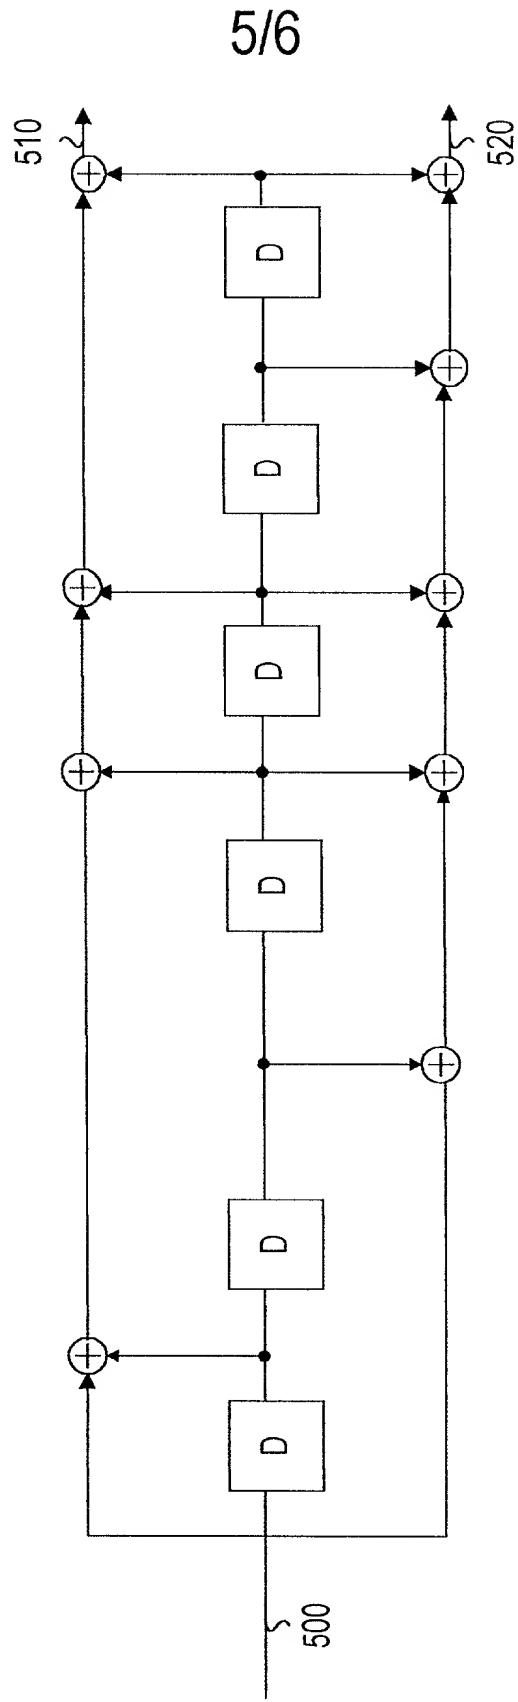


FIG. 5

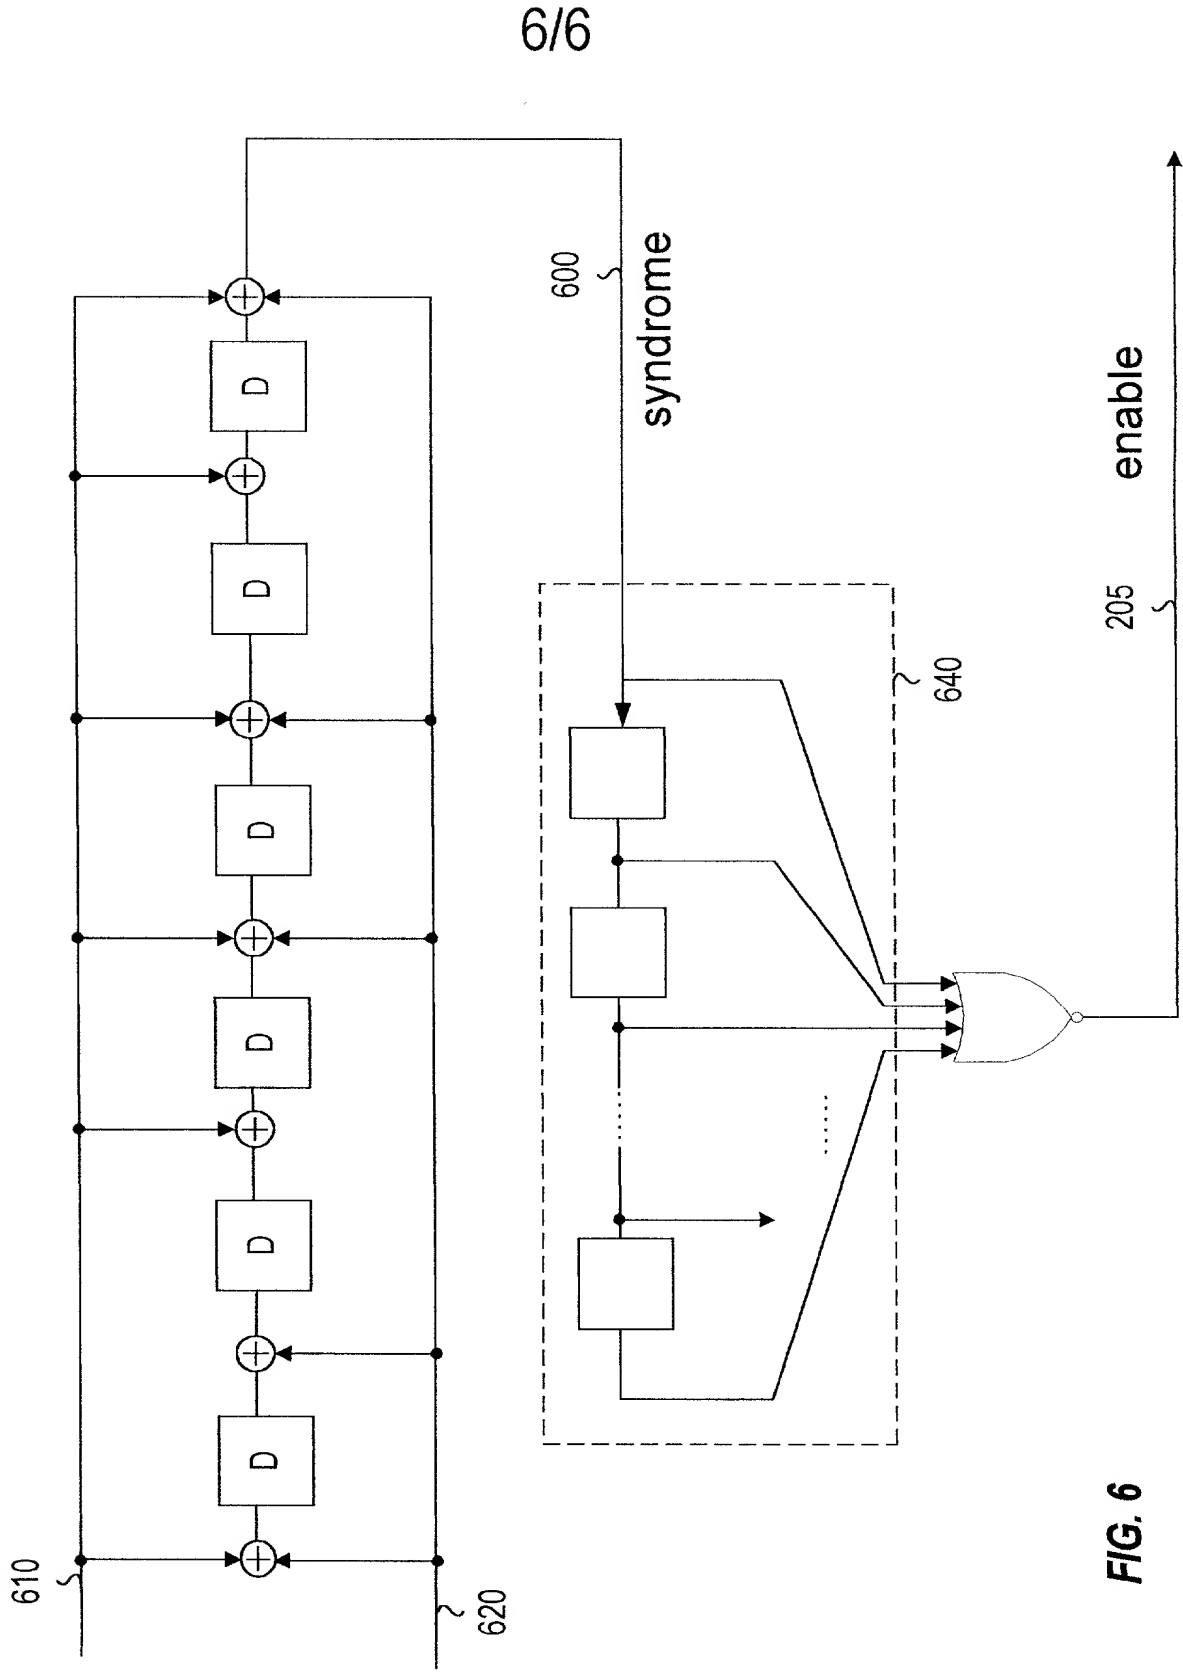


FIG. 6